
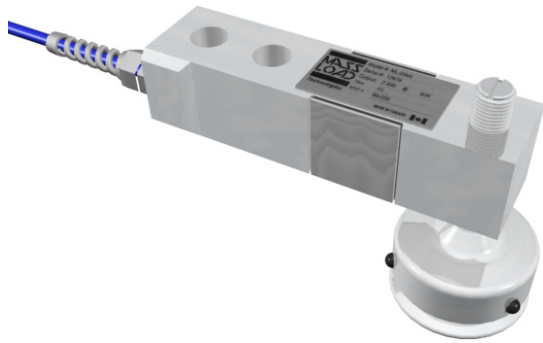


www.massload.com www.massload.com www.massload.com www.massload.com www.massload.com  
**Free Floating Foot**  
www.massload.com www.massload.com www.massload.com www.massload.com www.massload.com

**M**assloads Free Floating Foot is specially designed to work with the GN100 series of loadcells. This simple system is great for floor scale type applications.

Due to it's design, the free floating foot will reduce the end or side loading of the loadcell, giving more accurate weighing results. It is also self-levelling and easily height adjustable through the loadcell, making it ideal for uneven floors.

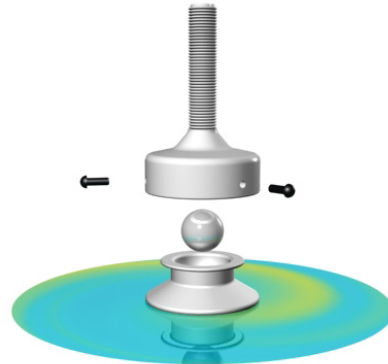

The Floating Foot is available in Zinc plated alloy steel or stainless steel. Both materials are heat treated to RC40-45 hardness.

Two different sizes are also available. The smaller model comes with a 1/2" UNF thread for the GN100 1K - 4K. The larger with a 3/4" UNF thread for the GN100 5K - 10K loadcell. Both units are held together with stainless steel pins that can be removed for cleaning or bearing replacement.

**Food Safe:**

Inside all models of the Free Floating Foot cavity is a precision ground ball bearing that is surrounded by 'Petro-Can Purity FG' food grade grease. This grease has a high dropping point and excellent resistance to water wash out, not to mention excellent corrosion protection. 'Purity FG' meets the highest food industry standards: USDA H1 approved for incidental food contact applications and FDA regulation CFR 21 178.3570.

