



Manufactured according to OIML R60 standards

Capacity from 500 kg to 200000 kg

- 17-4 PH STAINLESS STEEL
- BIDIRECTIONAL TENSION AND COMPRESSION
- COMBINED ERROR $\leq \pm 0.05\%$
- PROTECTION RATING: IP68 (500 - 60000 kg) - IP67 (100000 - 200000 kg)



CAPACITY	kg	NET WEIGHT (kg)
500		1.2
1000		1.2
2000		1.2
5000		1.7
10000		1.8
20000		4.8
30000		5.3
60000		5.4
100000		12
150000		15
200000		25

CERTIFICATIONS

- EAC** Complies with the Eurasian Customs Union regulations
- UK CA** Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST

Calibration report

LAT Accredia calibration certificate ISO 376 or ASTM E74 for capacities from 1000 kg to 10000 kg

Ex ATEX II 1G 2D (zone 0-1-2-21-22) (CE - UK CA)

IECEx (zone 0-1-2-20-21-22)

EAC Ex Complies with the Eurasian Customs Union regulations for use in potentially explosive atmospheres

Ex-NEPSY Complies with Chinese market regulations for use in potentially explosive atmospheres


OPTIONS ON REQUEST

DESCRIPTION



Two redundant strain gauges Wheatstone bridges (350 Ω) with two output cables; for dual safety systems.

DIMENSIONS (mm)

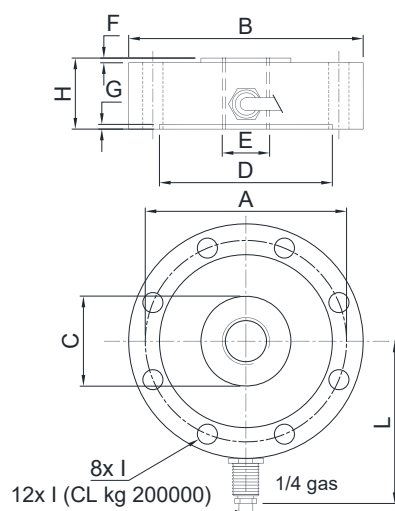

	kg 500 kg 1000 kg 2000	kg 5000 kg 10000	kg 20000 kg 30000 kg 60000	kg 100000	kg 150000	kg 200000
A	Ø 85	Ø 94	Ø 136	Ø 175	Ø 213	Ø 254
B	Ø 99	Ø 109	Ø 164	Ø 219	Ø 249	Ø 299
C	Ø 31	Ø 38	Ø 70	Ø 88	Ø 140	Ø 170
D	Ø 72	Ø 78	Ø 113	Ø 135	Ø 176	Ø 210
E	M20 x 1.5	M24 x 2	M48 x 3	M64 x 4	M72 x 4	M90 x 6
F	2	2	5	5	5	5
G	1.5	1.5	2	3	3	3
H	30	35	50	70	70	80
I (•)	Ø 8.5	Ø 8.5	Ø 16.5	Ø 26	Ø 26	Ø 26
L	68.5	73.5	101	128.5	143.5	168.5
Weight	1.1	1.4	5	11	16	26



For the load cell fixing screws (•), provide the tightening torque indicated in the table

Screw	M8				M16				M24			
Screw class	6.8	A2-70	8.8	A2-80	6.8	A2-70	8.8	A2-80	6.8	A2-70	8.8	A2-80
Tightening torque	15 Nm		20 Nm		120 Nm		160 Nm		400 Nm		550 Nm	

for capacities of 10000, 30000, 60000, 150000, 200000 kg use screws of class 8.8 or higher

TECHNICAL FEATURES

Material	17-4 PH stainless steel		
Nominal load (E max)	500 - 1000 - 2000 - 5000 - 10000 - 20000 - 30000 - 60000 - 100000 - 150000 - 200000 kg		
Combined error	≤ ±0.05%		
Protection rating	IP68 (500 - 60000 kg), IP67 (100000 - 200000 kg)		

Rated output	2 mV/V ± 0.3%	Input resistance	700 Ω ± 20
Temperature effect on zero	0.005% °C	Output resistance	700 Ω ± 5
Temperature effect on span	0.005% °C	Zero balance	± 1%
Compensated temperature range	-20 °C / +70 °C	Insulation resistance	> 5000 MΩ
Operating temperature range	-30 °C / +90 °C	Safe overload (% of full scale)	150%
Creep at nominal load in 30 minutes	0.3%	Ultimate overload (% of full scale)	300%
Max supply voltage without damage	15 V	Deflection at nominal load	0.3 mm

ELECTRICAL CONNECTIONS

Cable length	5 m
Cable diameter	5 mm
Cores	6 x 0.14 mm ²

